

**RIGHT OF WAY PERMIT APPLICATION**  
 (Becomes a permit when signed by City Engineer and \$300 deposit received)  
 For activity in city right of ways and public places.

This Application is for: \_\_\_\_\_ Phone: \_\_\_\_\_  
Name - Please Print

Address: \_\_\_\_\_  
Number and Street                      City                      State                      Zip

Date of Application: \_\_\_\_\_ Activity Dates: \_\_\_\_\_ to \_\_\_\_\_

Activity Address:  Same or \_\_\_\_\_

Type of Activity: \_\_\_\_\_

New/Larger Curb Cut? yes\_\_ no\_\_                      Size of Cut/Excavation: \_\_\_\_\_  
Before You Dig, Call Miss Dig 1-800-482-7171 to Locate Public Utilities.

Cut/Excavation By: \_\_\_\_\_ Phone: \_\_\_\_\_  
Company

Company Address: \_\_\_\_\_  
Number and Street                      City                      State                      Zip

Restoration By: \_\_\_\_\_ Phone: \_\_\_\_\_  
Company


Company Address: \_\_\_\_\_  
Number and Street                      City                      State                      Zip

Bond Amount: \$ \_\_\_\_\_ Date Bond Filed: \_\_\_\_\_  
 Fee Received: \$ \_\_\_\_\_ Deposit Received: \_\_\_\_\_ Date: \_\_\_\_\_

City Approval: \_\_\_\_\_ Date: \_\_\_\_\_  
City Engineer

Additional Information: \_\_\_\_\_

Location Sketch:

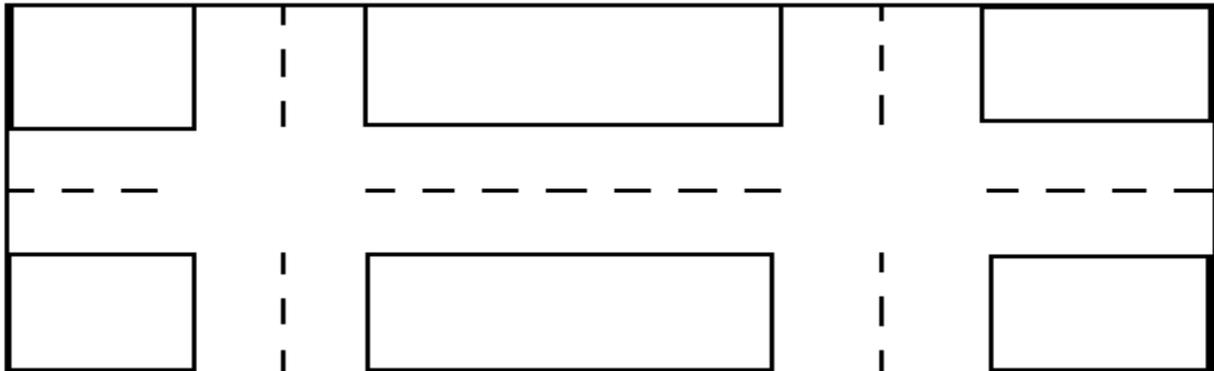

## RIGHT OF WAY PERMIT GENERAL CONDITIONS

### DUMPTERS

- shall be made visible to motorists and pedestrians by means of reflectors or barricades.
- shall be placed within the Applicant's property lines extended into the street.
- shall not be placed within 15 feet of a fire hydrant.
- shall not be placed so as to block or impair traffic flow in the street or motorists' line of sight.
- shall be kept in safe condition at all times.
- shall be removed from the right of way in a timely manner.
- any damage to the public right of way shall be corrected by the Applicant or their contractor at their expense.

### SIDEWALK SPECIFICATIONS

- Material: 6 bag 35P concrete mix as specified in the MDOT Standard Specifications  
Base material: class II granular material compacted to 95% maximum density  
Minimum thickness: 4" (6" when crossing a driveway)  
Minimum width: 5' \*  
Control joint spacing: 5'  
Expansion joint spacing: 20'  
Maximum running slope: 1 in 20\*  
Maximum cross slope: 1 in 48\*

\*from the 1993 Michigan Barrier Free Design Graphics Manual

### DRIVEWAY SPECIFICATIONS

That portion of driveways within the public right-of-way shall be paved with either:

- 6" thick non-reinforced 6 bag 35P concrete
- 4" thick wire reinforced 6 bag 35P concrete
- 2" thick asphalt

- Minimum width at right-of-way line: 9'  
Maximum width at right-of-way line: 16'  
Maximum flare: 1.5 times the width at right-of-way line.

The above specifications shall not be interpreted as a complete list, please see applicable zoning and engineering requirements.